





V2VENTS.COM (916) 652-7424 info@newcalmetals.com P.O. Box 1126 Loomis, CA. 95650


For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A*

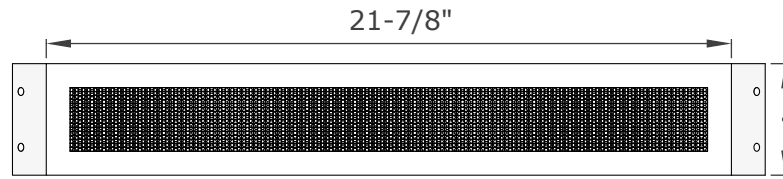


TOP VIEW




Intumescent Core

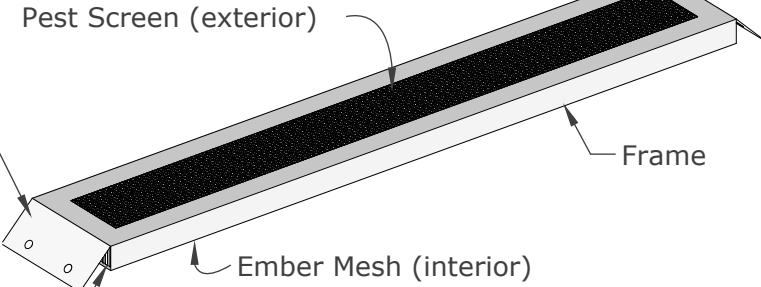

ISOMETRIC VIEW

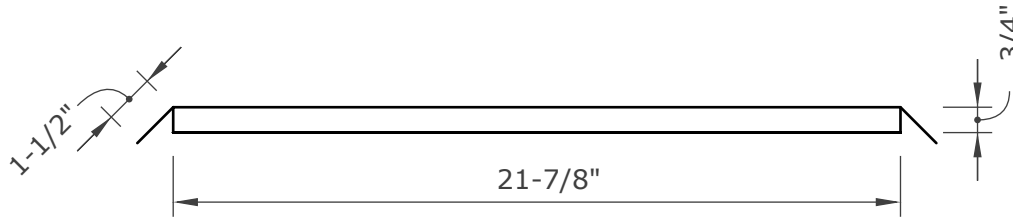

SIDE VIEW

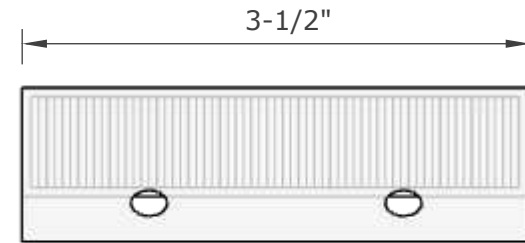

END VIEW (X-Ray)

Required Installation:

Use **EverKem 814+ intumescent firestop caulking** or equivalent, BEHIND flanges.
For application details and installation examples, please visit www.V2Vents.com

FSVE3522RT PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:



www.newcalmetals.com

Model Description	Eave Vent
Model Number	FSVE3522RT
Model Size	21-7/8" x 3-1/2"

Flange Type	Reverse Tab
NFVA	41 sq. in.

Frame & Flange	G90 Galvanized Steel - 26GA
Intumescent Core	5mm Hexagonal Matrix - Aluminum with intumescent coating
Ember Mesh	14 Mesh - 304 Stainless Steel (Faces interior)
Pest Screen	Galvanized Steel Screen - 1/8" (Faces exterior)