



Approved for use in the Wildland Urban Interface (W.U.I.)


**Chapter 7A** compliant: Tested and listed to ASTM2886.  
OSFM BML listing: 8165-2426 | QAI listing: B1155

Revision Date: February 25, 2020




V2VENTS.COM (916) 652-7424 info@newcalmetals.com P.O. Box 1126 Loomis, CA. 95650


**For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A\***

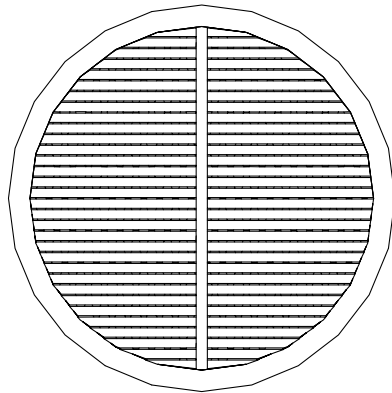


TOP VIEW

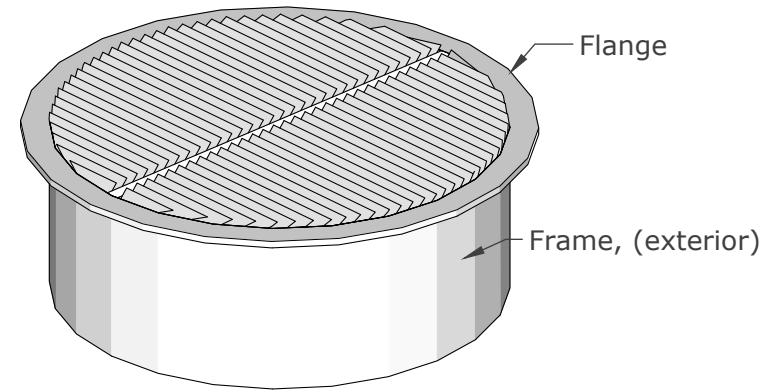


ISOMETRIC VIEWS



Intumescent Core

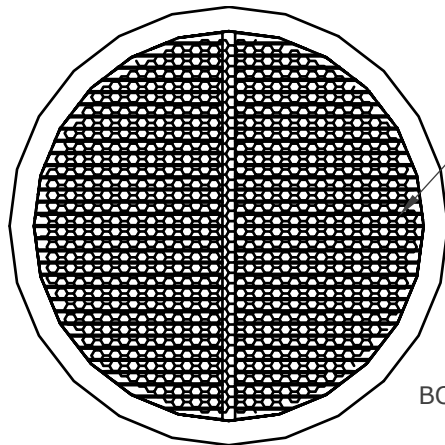

BOTTOM VIEW

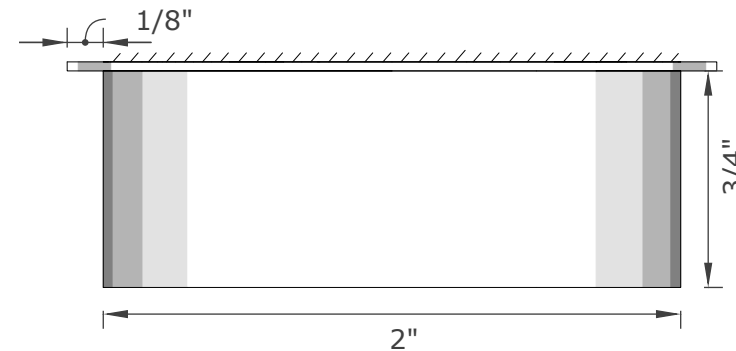

**Required Installation:**

Use **EverKem 814+ intumescent firestop caulking** or equivalent, BEHIND flanges.  
For application details and installation examples, please visit [www.V2Vents.com](http://www.V2Vents.com)

Proudly Manufactured By:



[www.newcalmetals.com](http://www.newcalmetals.com)

**FSVER2 PRODUCT SPECIFICATION & DATA SHEET**

|                   |                        |             |                     |                  |   |
|-------------------|------------------------|-------------|---------------------|------------------|---|
| Model Description | <b>Round Eave Vent</b> | Flange Type | <b>Flange Front</b> | Frame & Flange   | <b>G90 Galvanized Steel - 26GA</b>                              |
| Model Number      | <b>FSVER2</b>          | NFVA        | <b>1</b>            | Intumescent Core | <b>5mm Hexagonal Matrix - Aluminum with intumescent coating</b> |
| Model Size        | <b>2" x 2"</b>         |             |                     |                  |   |