





V2VENTS.COM (916) 652-7424 info@newcalmetals.com P.O. Box 1126 Loomis, CA. 95650


For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A*

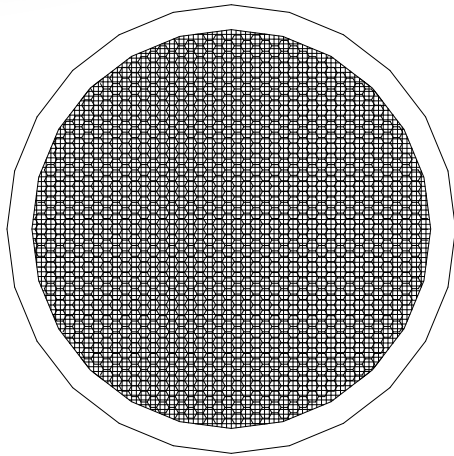


TOP VIEW




Intumescent Core

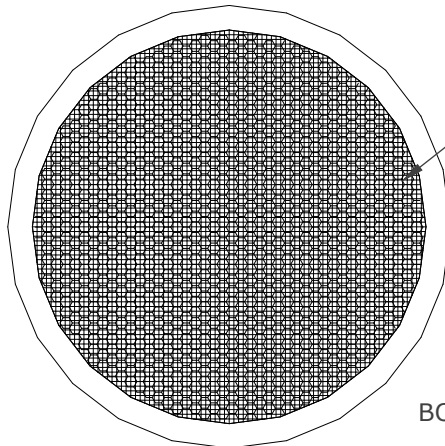

BOTTOM VIEW

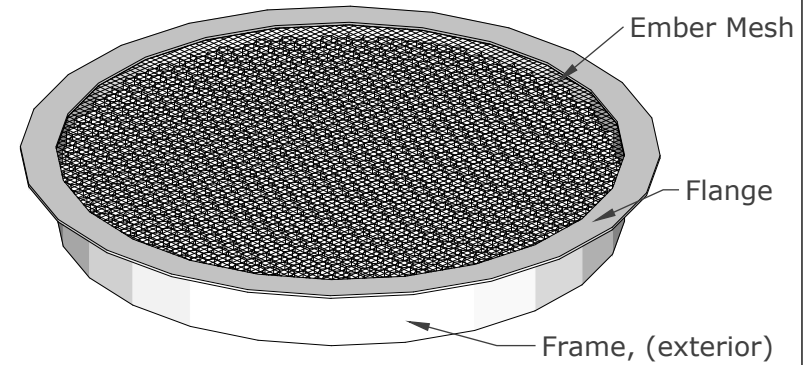

ISOMETRIC VIEW

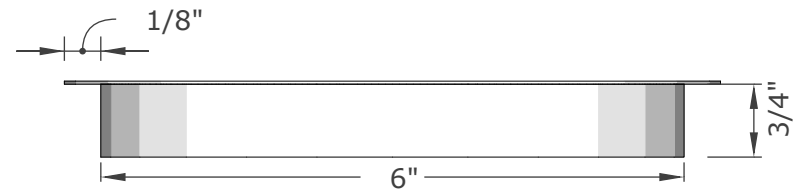

SIDE VIEW

Required Installation:

Use **EverKem 814+ intumescent firestop caulking** or equivalent, BEHIND flanges.
For application details and installation examples, please visit www.V2Vents.com

Proudly Manufactured By:



www.newcalmetals.com

FSVER6M PRODUCT SPECIFICATION & DATA SHEET

Model Description	Round Eave Vent	Flange Type	Flange Front	Frame & Flange	Aluminum
Model Number	FSVER6M	NFVA	17 sq. in.	Intumescent Core	5mm Hexagonal Matrix - Aluminum with intumescent coating
Model Size	6" x 6" x 3/4"			Ember Mesh	14 Steel Mesh