




Approved for use in the Wildland Urban Interface (W.U.I.)

Chapter 7A compliant: Tested and listed to ASTM2886.
OSFM BML listing: 8165-2426 | QAI listing: B1155




V2VENTS.COM (916) 652-7424 info@vulcanvents.com P.O. Box 1126 Loomis, CA. 95650


For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A*

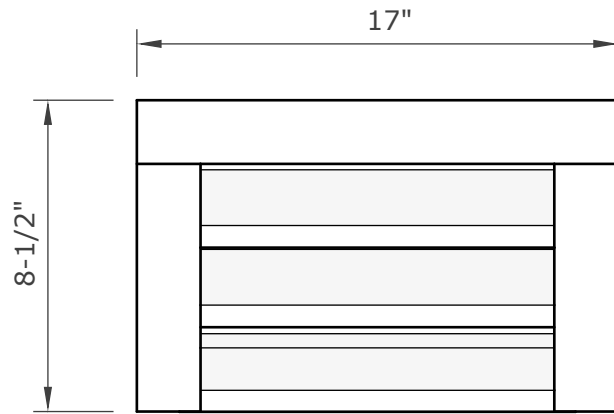


TOP VIEW




Intumescent Core

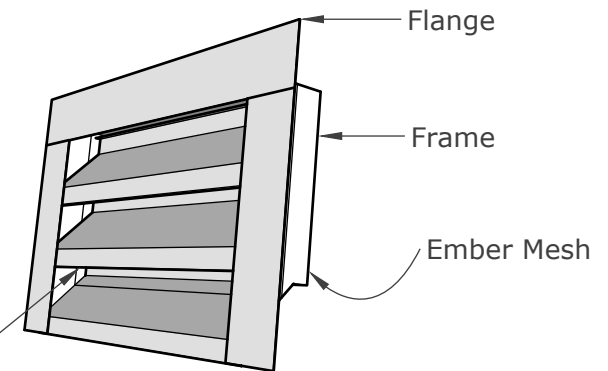

ISOMETRIC VIEW

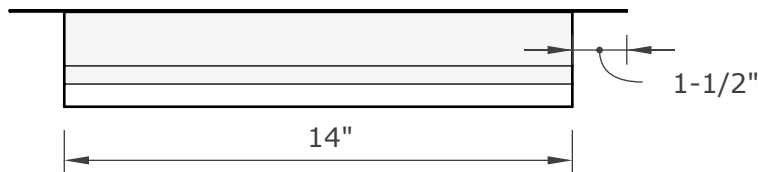

END VIEW

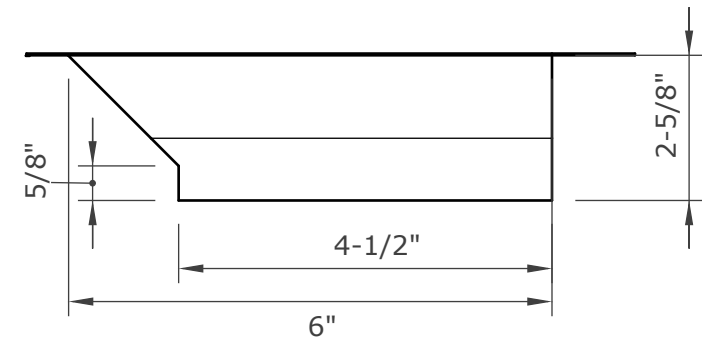


END VIEW

Reiured Installation:

Use EverKem 814+ intumescent firestop caulking or equivalent, BEHIND flanges.
For application details and installation examples, please visit www.V2Vents.com

Proudly Manufactured By: **NEW CAL METALS INC.**

www.newcalmetals.com



FSVFS614LFF PRODUCT SPECIFICATION & DATA SHEET

Model Description	Foundation Vent	Flange Type	Flange Front	Frame & Flange	G90 Galvanized Perforated Steel (1/8" holes) - 24GA
Model Number	FSVFS614LFF	NFVA	20 sq. in.	Intumescent Core	5mm Hexagonal Matrix - Aluminum with intumescent coating
Model Size	6"x 14"			Ember Mesh	14 Mesh - 304 Stainless Steel