




Approved for use in the Wildland Urban Interface (W.U.I.)

**Chapter 7A** compliant: Tested and listed to ASTM2886.  
OSFM BML listing: 8165-2426 | QAI listing: B1155




V2VENTS.COM (916) 652-7424 info@vulcanvents.com P.O. Box 1126 Loomis, CA. 95650


**For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A\***

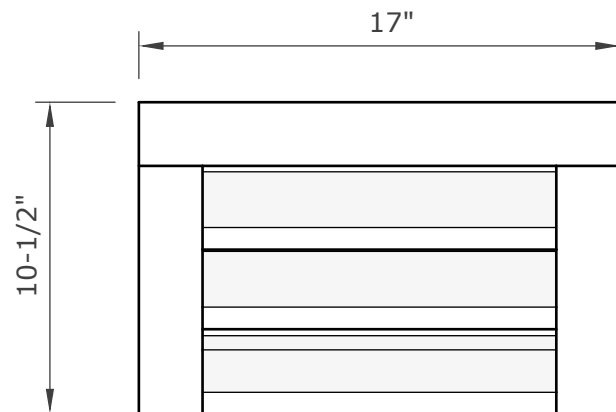


TOP VIEW




Intumescent Core

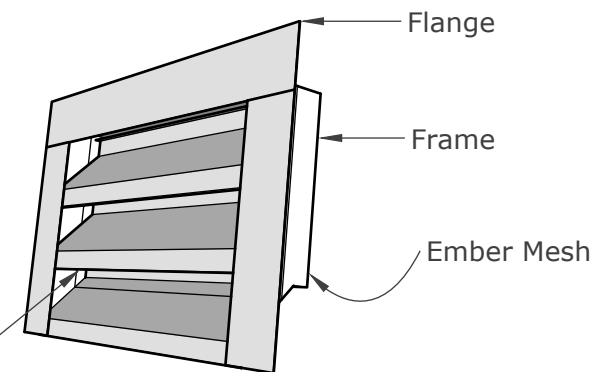

ISOMETRIC VIEW

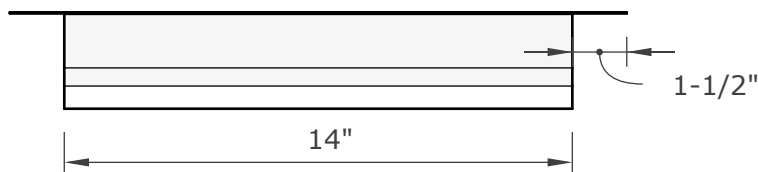

END VIEW

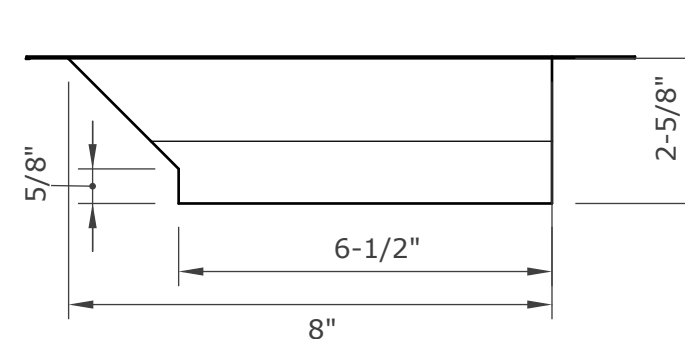


END VIEW

**Reiured Installation:**

**Use EverKem 814+ intumescent firestop caulking** or equivalent, BEHIND flanges.  
For application details and installation examples, please visit [www.V2Vents.com](http://www.V2Vents.com)

Proudly Manufactured By: **NEW CAL METALS INC.**

[www.newcalmetals.com](http://www.newcalmetals.com)



**FSVFS814LFF PRODUCT SPECIFICATION & DATA SHEET**

Model Description	<b>Foundation Vent</b>	Flange Type	<b>Flange Front</b>	Frame & Flange	<b>G90 Galvanized Perforated Steel (1/8" holes) - 24GA</b>
Model Number	<b>FSVFS814LFF</b>	NFVA	<b>31 sq. in.</b>	Intumescent Core	<b>5mm Hexagonal Matrix - Aluminum with intumescent coating</b>
Model Size	<b>8"x 14"</b>			Ember Mesh	<b>14 Mesh - 304 Stainless Steel</b>