





V2VENTS.COM (916) 652-7424 info@vulcanvents.com P.O. Box 1126 Loomis, CA. 95650


For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A*

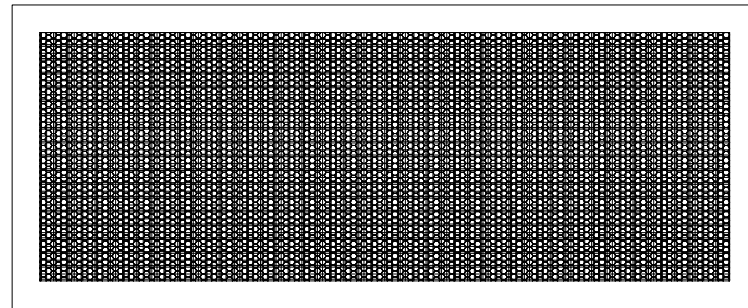


TOP VIEW

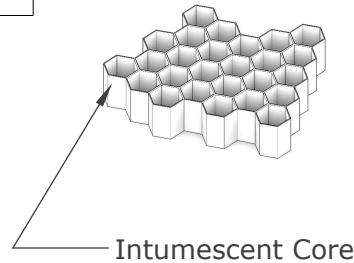


Intumescent Core

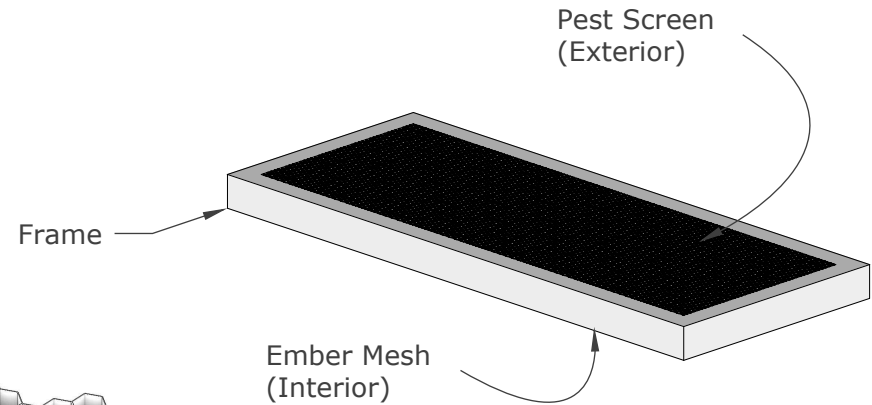

ISOMETRIC VIEW

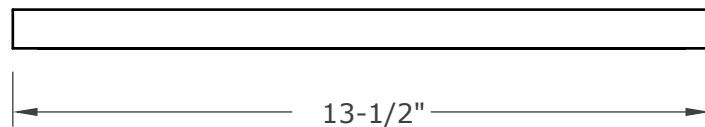

FRONT VIEW

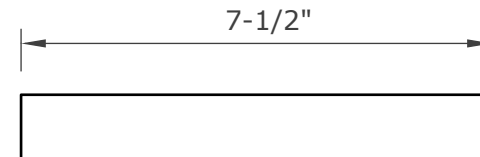

SIDE VIEW

Required Installation:

Use **EverKem 814+ intumescent firestop caulking** or equivalent, BEHIND flanges.
For application details and installation examples, please visit www.V2Vents.com

FSVFS814NF PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By: **NEW CAL METALS INC.**

www.newcalmetals.com

Model Description	Foundation/Soffit Vent	Flange Type	No Flange	Frame & Flange	G90 Galvanized Steel - 26GA
Model Number	FSVFS814NF	NFVA	62 sq. in.	Intumescent Core	5mm Hexagonal Matrix - Aluminum with intumescent coating
Model Size	13-1/2" x 7-1/2"			Ember Mesh	14 Mesh - 304 Stainless Steel (Faces interior)
				Pest Screen	Galvanized Steel Screen - 1/8" (Faces exterior)