





V2VENTS.COM (916) 652-7424 info@newcalmetals.com P.O. Box 1126 Loomis, CA. 95650


For use to comply with IWUI, IBHS Wildfire Prepared Certification, California Chapter 7A*

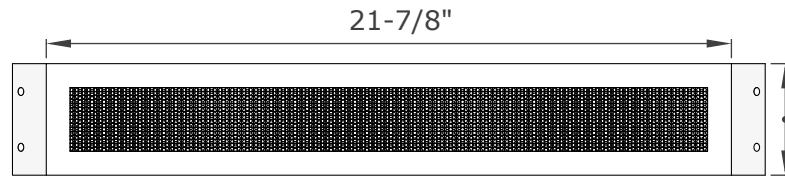


TOP VIEW




Intumescent Core

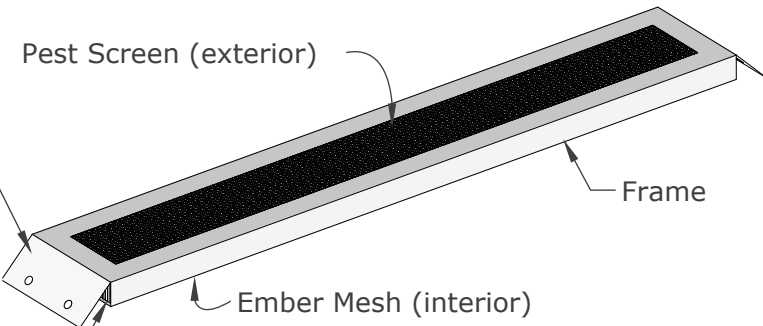

ISOMETRIC VIEW

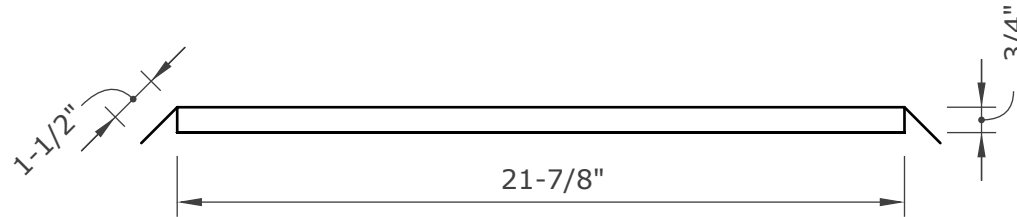

SIDE VIEW

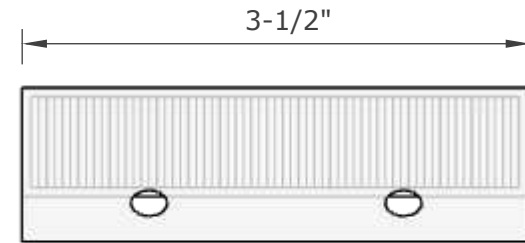

END VIEW (X-Ray)

Required Installation:

Use **EverKem 814+ intumescent firestop caulking** or equivalent, BEHIND flanges.
For application details and installation examples, please visit www.V2Vents.com

FSVE3522RT PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By: NEW CAL METALS INC.

www.newcalmetals.com

Model Description | **Eave Vent**
Model Number | **FSVE3522RT**
Model Size | **21-7/8" x 3-1/2"**

Flange Type | **Reverse Tab**
NFVA | **41 sq. in.**

Frame & Flange | **G90 Galvanized Steel - 26GA**
Intumescent Core | **5mm Hexagonal Matrix - Aluminum with intumescent coating**
Ember Mesh | **14 Mesh - 304 Stainless Steel (Faces interior)**
Pest Screen | **Galvanized Steel Screen - 1/8" (Faces exterior)**

Frame & Flange | **G90 Galvanized Steel - 26GA**
Intumescent Core | **5mm Hexagonal Matrix - Aluminum with intumescent coating**
Ember Mesh | **14 Mesh - 304 Stainless Steel (Faces interior)**
Pest Screen | **Galvanized Steel Screen - 1/8" (Faces exterior)**